

10/526842  
Rec'd PCT/PTO 28 FEB 2005  
PC U03/01100



REC'D 17 SEP 2003

WIPO

PCT

Patent Office  
Canberra

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, SMILJA DRAGOSAVLJEVIC, TEAM LEADER EXAMINATION  
SUPPORT AND SALES hereby certify that annexed is a true copy of the  
Provisional specification in connection with Application No. 2002951062 for a  
patent by NUKORC PTY LTD as filed on 29 August 2002.

WITNESS my hand this  
Fifth day of September 2003

*S. Dragosavljevic*

SMILJA DRAGOSAVLJEVIC  
TEAM LEADER EXAMINATION  
SUPPORT AND SALES



BEST AVAILABLE COPY

53957 GEH:JOM:WZ

P/00/009  
Regulation 3.2

AUSTRALIA  
Patents Act 1990

**ORIGINAL**

**PROVISIONAL SPECIFICATION FOR AN INVENTION  
ENTITLED**

Invention Title: AN IMPROVED SYNTHETIC CLOSURE AND A  
METHOD OF FORMING THEREOF

Name of Applicant: NUKORC PTY LTD

Address for Service: COLLISON & CO 117 King William Street,  
Adelaide, S.A. 5000

**The invention is described in the following statement:**

This invention relates to closures made of expanded plastic material having a beveled or chamfered end and a method of forming such closures.

5 Wine bottles have traditionally been stoppered with corks made from natural cork material. However, this material can be subject to initial flaws, or deteriorate in use, resulting in contamination or spoilage of wine.

A common and well-known alternative to cork for sealing bottles, particularly wine, are "synthetic closures" or "synthetic corks". These synthetic closures are made from expanded plastic material produced predominantly by either an injection molding or extrusion process.

10 An extruded synthetic closure, by virtue of employing a blade in the process of cutting the closures down to a predetermined length, tends to form an end that is substantially at an angle normal to the remaining body position of the closure.

15 A problem with such an arrangement is that when the closure is being compressed for insertion into the neck of a bottle, the insertable end bulges out from the body. This increases the diameter of the end with respect to the opening in the neck of the bottle and the remaining body portion of the closure. As the closure is forced into the neck, a bulged end is more likely to be torn away from the closure.

20 Further, as the end after compression of the closure remains at a greater diameter with the remaining body portion, once the closure is inserted into a bottle and withdrawn it then becomes difficult to reinsert the closure back into the bottle. If the closure with a bulged end is to be reinserted back into the bottle, more than a nominal force will need to be applied by a person in order to overcome the abutting surfaces of the bulge end against the neck of the bottle.

25 One way of overcoming the problems associated with either the bulge or normal angled corner between the end and the body of the closure is to grind back the corner to form a beveled end with respect to the body. By grinding the end of the closure before compression of the closure for insertion into the bottle, the removed grinded material compensates for any anticipated increase  
30 in the diameter that will occur at the end of the closure brought about by the compressive forces. As the diameter of the end remains less than the

remaining body position of the closure, abutment of the closure with the opening is limited or at least substantially avoided.

Further, as the end of the closure remains smaller than the remaining body portion, this beveling effect brought about by the grinding process, assists in  
5 reinserting the closure back into the bottle once withdrawn.

However, a problem with the grinding process is that as material is ground away from the end to reduce the diameter to create the beveled effect, unattached specks remain on the closure surface. When the closure is inserted into the bottle these specks may dislodge and contaminate the contents of the  
10 bottle.

It is, therefore, an object of the present invention to provide a closure having a beveled or chamfered end and a method of forming such a closure without the need for grinding.

It is another object of the present invention to overcome, or at least substantially  
15 ameliorate some of the disadvantages and shortcomings of the closures discussed above.

Accordingly, in one form of the invention, although it need not necessarily be the only or indeed the broadest form of the invention, there is provided a method of treating a closure made of expanded plastic material including heat shrinking the closure to effect a beveled end.  
20

In a preferred form, the heat shrinking means includes a heating member adapted to contact an end of the closure. Preferably, the heating member is adapted to contact both ends of the closure.

An advantage of such an arrangement is that the heat shrinking of the closure to  
25 form a beveled end creates no separation or particles of specks from the closure, thereby avoiding any part of the closure contaminating the contents of the bottle.

An advantage of such an arrangement is that either end of the closure is effected for insertability into the neck of the bottle. Beveling at both ends of the closure  
30 enables versatility of the closure to be inserted at either end into the neck of the bottle

In a further preferred form, the heating member includes two elongated elements adapted to contact opposing ends of the closure. Preferably, the elements are such arranged to sufficiently support each end of the closure respectively so that when the closure is rolled along a contactable heating surface of each element, contact between the closure and element shrinks each end for a beveled effect.

Alternatively, the closure remains stationary with the heating elements rotably contacting the opposing ends to effect beveling of the ends.

Preferably, the elements contact only the ends of the closure.

10 Preferably, the elements are elongated.

An advantage of having two separate elements contacting only the ends of the closure enables the main body portion of the closure to be unexposed to any further heating in the expanded plastic state. As the body portion of the closure is not subjected to any heat during the heat shrinking process, printed indicia can be placed on the main body portion of the closures before the closures are subjected to the heat shrinking of the ends to provide the beveled effect.

In a preferred form the beveled effect includes a tapered edge between the end and the remaining body portion of the closure.

20 In a further preferred form of this invention, although it need not necessarily be the only further form or indeed the broadest form, there is provided a closure made of expanded plastic material adapted for insertion into the neck of a bottle, said closure including a heat shrunk beveled end.

In a preferred form, the heat shrunk beveled end includes a tapered edge between the end and a remaining body portion.

25 For a better understanding of this invention, it will now be described in relation to a preferred embodiment, which shall be described with the assistance of drawings wherein:

Fig 1 is a perspective view of a closure prior to forming;

30 Fig 2 is a perspective view of a closure according to a preferred embodiment post forming;

Fig 3 is a schematic view from the end of the machine;

Fig 4 is a perspective view of the closure passing across heat contactable surfaces of the heating elements;

5 Figs 5, 6 are cross-sectional views of the closure passing across heat contactable surfaces of the heating elements;

Fig 7 is a schematic view from the end of the machine illustrating the adjustment mechanism for aligning the angle of inclination of the heating elements with respect to the ends of the closure during heat shrinking;

10 Fig 8 is schematic view from the front of the machine illustrating the adjustment mechanism for accommodating closures of differing diameters.

Referring to the drawings in detail, a closure 10 includes an annular beveled portion 12, 14 depending from a periphery at ends 16, 18 of the closure 10 thereof.

15 The annular beveled portions 12, 14 include a part spherical edge between an external surface 20, 22 at each end 16, 18 and a vertical cylindrical or tubular wall 24 disposed between the two opposed ends 16, 18.

The tubular wall 24 includes a main body 26 of the closure 10. The tubular wall 24 is integrally connected to the ends 16, 18.

20 The diameter X (shown as a thin broken line in fig 1) for the closure 10 at the annular beveled portions 12, 14 is of a lesser length than the diameter Y (shown as a thicker broken line in fig1) across the main body 26 surrounding by the tubular wall 24.

25 During compression of the closure 10 before insertion into a neck of a bottle (not shown) for sealing, the diameter Y of the tubular wall 24 surrounding the body 26 is reduced. Previously, this reduction of the diameter Y of the tubular wall 24 and body 26 resulted in the ends 16, 18 of the closure 10 bulging relative to the tubular wall 24 and the body 26. The bulge region or annular portion of the closure 10 that remained at the end of the tubular wall 24 made insertion of the closure 10 into the neck of the bottle more difficult due to abutment of the  
30 bulged ends with the rim of the neck of the bottle.

The problem being these ends of the closure 10 were subjected to a greater risk of damage, with the possibility of portions tearing away. Further, once the inserted closure was withdrawn, the compressed body 26 and tubular wall 24, though in part returning to an uncompressed state, maintained a diameter Y less than the diameter X at the ends. With the greater diameter at the ends of the closure 10, reinsertion of the closure 10 back into the bottle after withdrawal required more than just the nominal force of a user.

Referring to figs 3-8, there is shown a preferred method of forming the annular beveled portion 12, 14 around the ends 16, 18 of the closure 10 reducing the difficulties of the bulged ends.

It is, however, to be appreciated that a beveled presented edge between the tubular wall 24 and ends 16, 18 can be made available in a variety of forms. In the preferred form as shown in the figures, the ends are beveled. However, any edge presenting a peripheral portion at an end with a smaller diameter to the main body 26 will suffice. For example, a uniform linear acute angled depression between the tubular wall 24 and the external surfaces 20, 22 at the ends 16, 18 provide for an end portion of a lesser diameter to the remaining body portion 26 of the closure 10.

In fig 3 the closure 10, already formed from a conventional extrusion process, as shown in fig 1, is ready to undergo heat shrinking treatment at ends 16, 18.

The heat shrinking of the closure at ends 16, 18 accomplishes the beveled effect, as shown by way of example in fig 2.

The closure 10 is fed into a rectangular shaft 28 by a guide 30. Both shaft 28 and guide 30 are of a comparable size to the closure 10. The closure 10 passes down the shaft 28. As best shown in figs 3 and 4, the closure 10 falls through the shaft 28 and is interrupted by platform 32 where a piston rod 34 sets the closure 10 into a circular movement motion along channel 36.

The channel 36 includes guides 38, 40 and heating elements 42, 44.

The top of the channel 36 also includes conveyor belt 45 (not shown) to assist the closure 10 travel along the channel 36. The conveyor belt 45 places a downward pressure on the closure as it rolls along the channel 36. The

downward pressure is sufficient to effect beveling at ends 16, 18 with the heating elements 42, 44.

As best shown in figs 5 to 7, the heating elements 42, 44 include heat contactable surfaces 46, 47 that engage the ends 16, 18 of the closure 10.

- 5 Alignment of the heating elements 42, 44 out of the horizontal plane of the channel 36 inclines the heat contactable surfaces 46, 47 such that limited contact is made between the heating elements 44, 44 and the closure 10. The inclined heating elements 42, 44 expose the heat contactable surfaces 46, 47 such that engagement is made with ends 16, 18 of the closure 10 and not with the  
10 remaining tubular wall 24.

As heat shrinking is only occurring at the ends 16, 18 of the closure 10, the tubular wall 24 remains unaffected from the heat shrinking process and thereby any printed material thereon the main body 26 is not subject to unnecessary detrimental heating that may deteriorate the printed material.

- 15 The contact of the heating elements 42, 44 with the ends 16, 18 heat shrinks the expanded plastic material of the extruded closure 10. The closure 10 engages with the heating elements 42, 44 as it rolls along the heat contactable surfaces 46, 47 effecting a beveled heat shrinking of the ends 16, 18 to form the annular beveled portions 12, 14 that depend inwards from the periphery at each end  
20 16, 18.

- It is, however, to be appreciated that it is only the preferred embodiment that includes the two heating elements 42, 44. Alternatively, for example a single heating element having just the one heat contactable surface may engage one end of the closure 10. That end of the closure 10 is then insertable into the neck  
25 of the bottle.

Further, the rolling action of the closure 10 with respect to the heat contactable surfaces 46, 47 of the heating elements 42, 44 alternatively may be replaced by fixed contact between a stationary closure 10 and a moveable engageable heat contactable surface of the heating element or elements.

- 30 As shown in fig 7, the forming operation for effecting the heat shrunk tapered ends 16, 18 can be carried out on a closure 10 with a variety of diameters.



Removing, support blocks 48, 50, will lower the heating elements 42, 44 relative to each other. Similarly, the height of the heating elements can be varied by using support blocks 48, 50 of varying thicknesses, and/or using shims or spacers. Furthermore, by utilising support blocks 48, 50 and or spacers of tapering profile, effect can be given to change the angle of inclination of the heating elements 42, 44 with respect to the horizontal plane of the channel 36.

Closures 10 of varying length are facilitated in the channel 36 by means of adjustment of the base elements 52, 54 in a substantially horizontal plane, normal to the direction of closure 10 travel along the channel 36. This permits variation of the distance between the heat contactable surfaces 46, 47 and guides 38, 40 all of which are in cooperation with the base elements 52, 54.

As best seen in figs 7 and 8, the forming operation for effecting the degree of beveling of the ends 16, 18 of the closure 10 can also be adjusted.


The steps 56 include rises 58 which act as abutments for the base 52, 54 to abut. The height of the heating elements 42, 44 can be adjusted by abutting base 52, 54 with respective rises 58 of the steps 56. This facilitates an easier and therefore more convenient means of adjusting for closure of varying diameters.

It is to be appreciated by persons skilled in the art, that numerous variations and/or modifications may be made to the invention as shown in the specific preferred embodiment, without departing from the spirit or scope of the invention as broadly described.


The present embodiment is, therefore, to be considered in all respects as illustrative and not restrictive. Particularly, it can be appreciated that a variety of forms and shapes of the heating element may be made contactable with the closure in order to bring about heat shrinkage which effects a beveled end of the closure. It is the intention of this description to incorporate such arrangements.

Dated this 29th day of August 2002


NUKORC PTY LTD  
By their Patent Attorneys  
COLLISON & CO

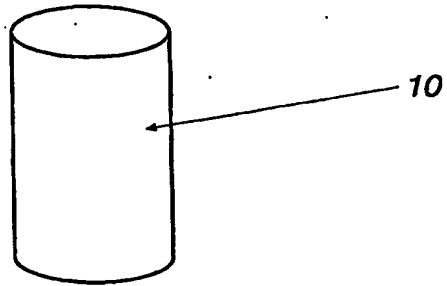


**Fig 1**

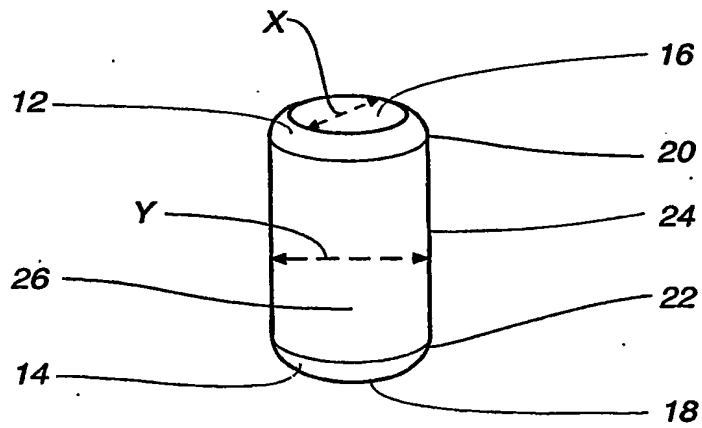


**Fig 2**

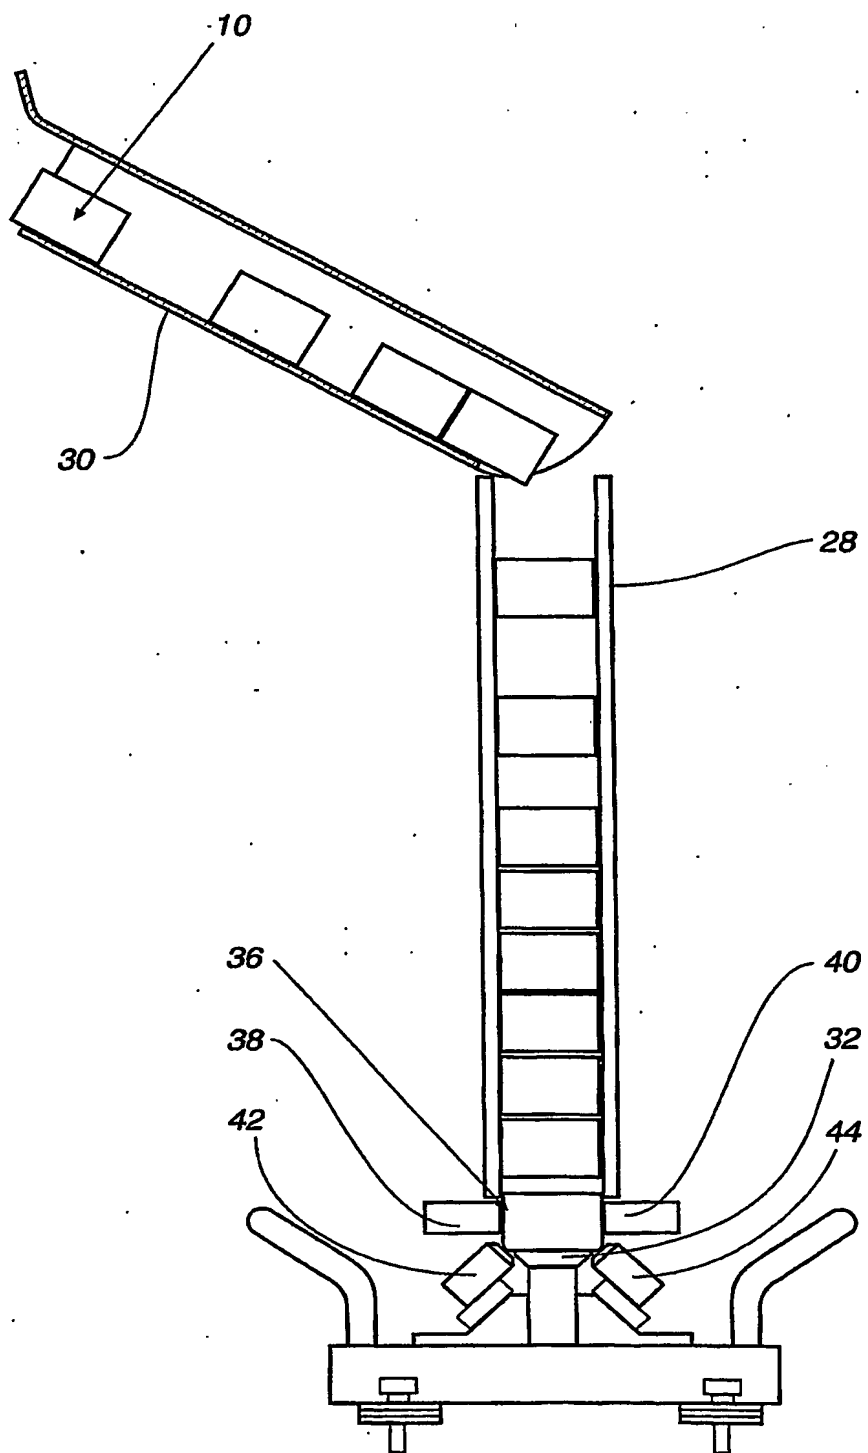


**Fig 3**

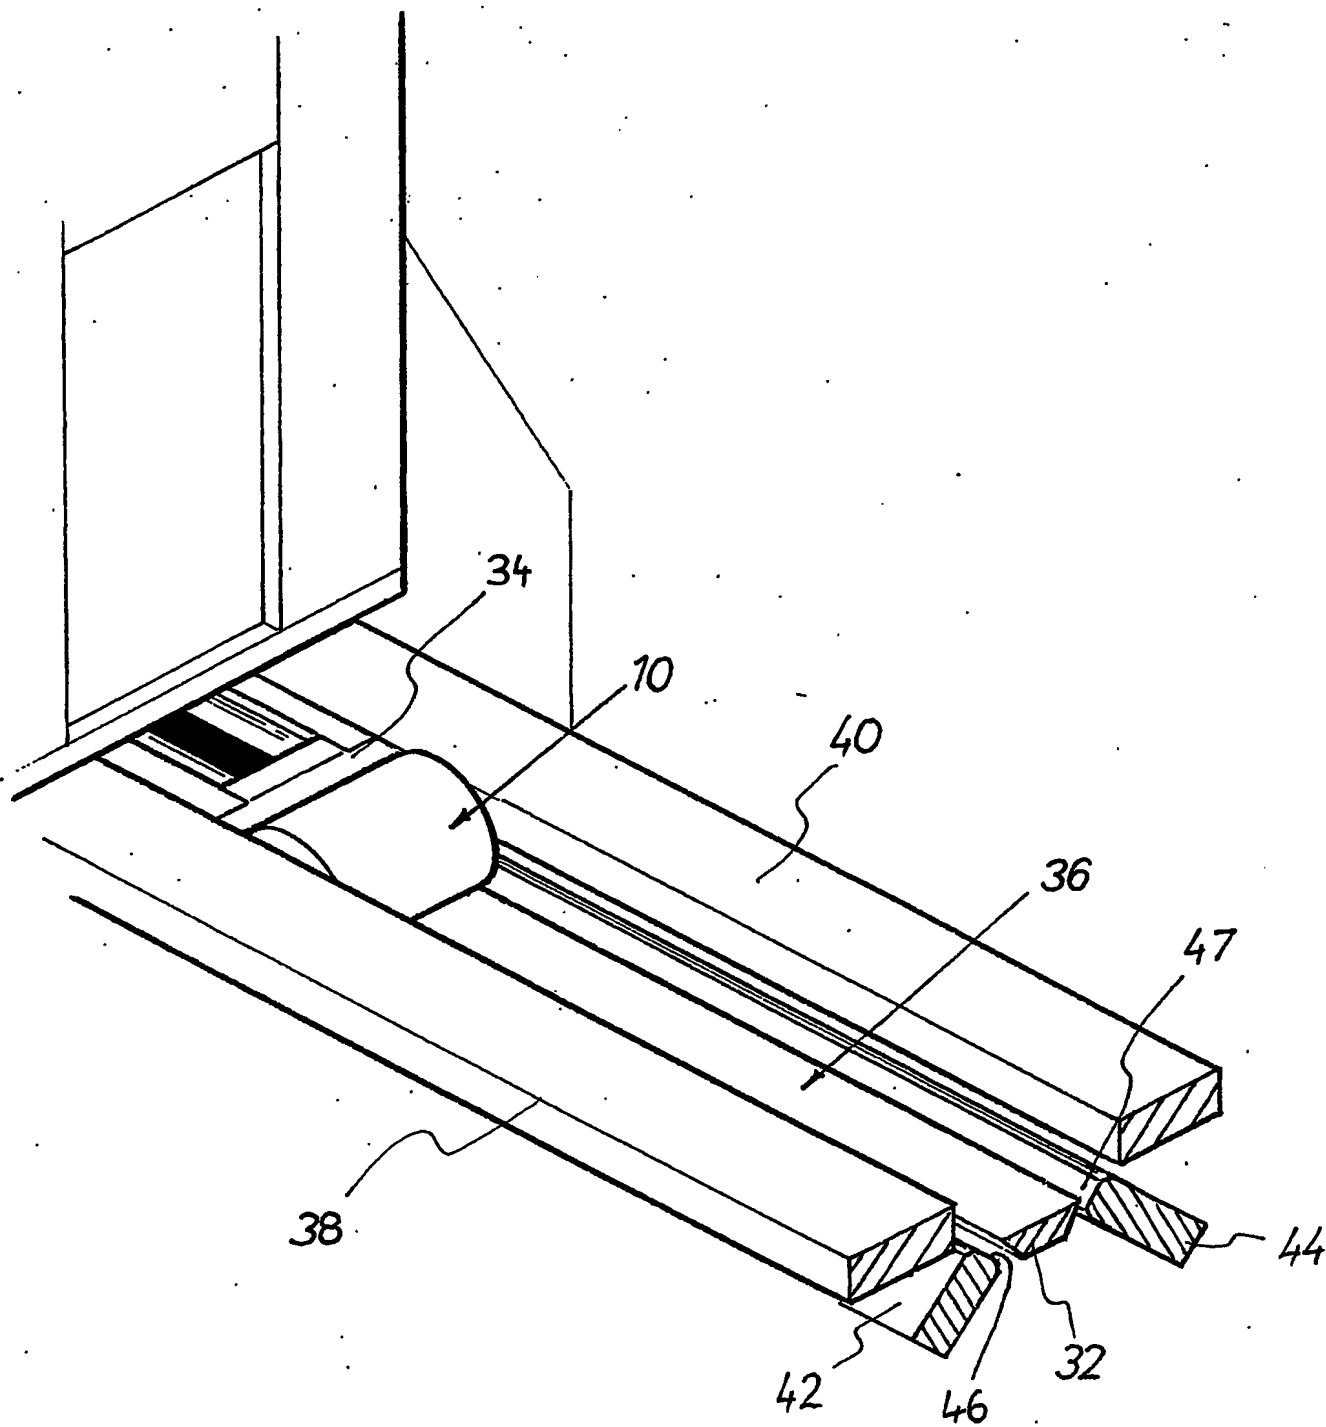


*Fig 4*

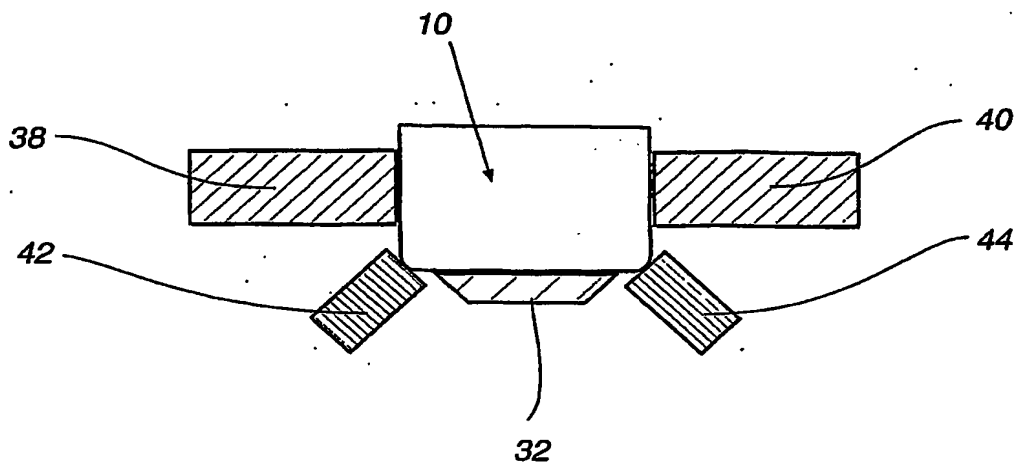


**Fig 5**

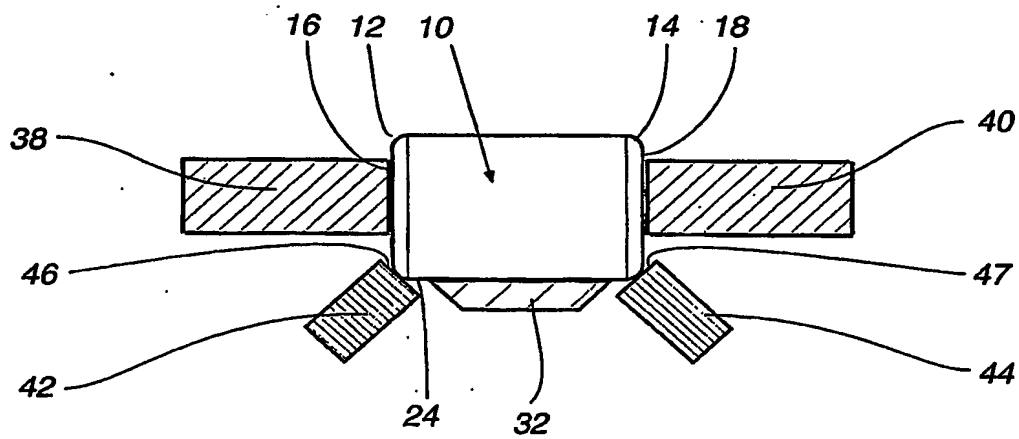

**Fig 6**

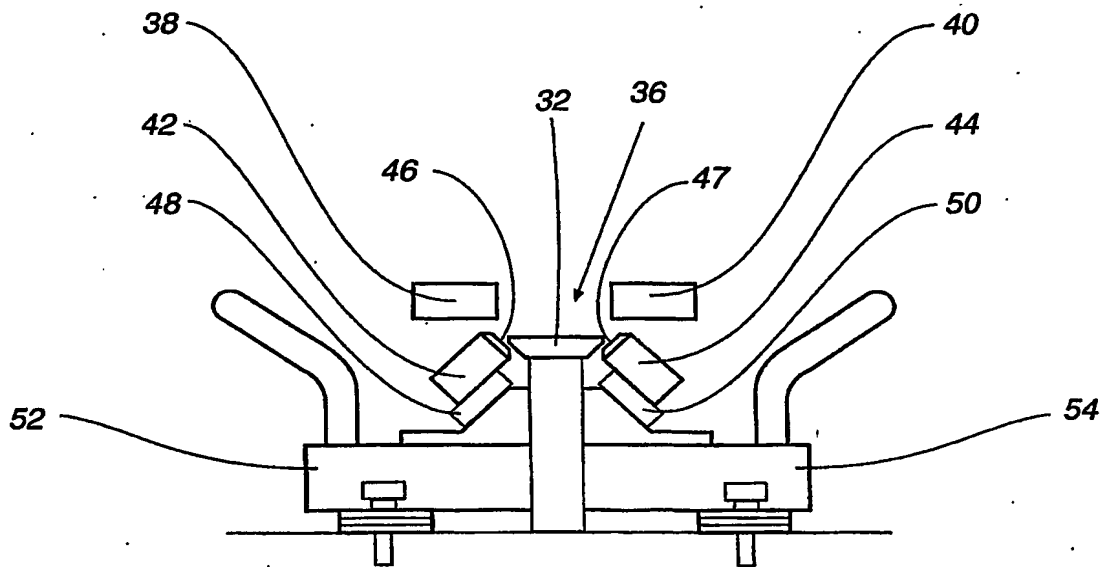

**Fig 7**

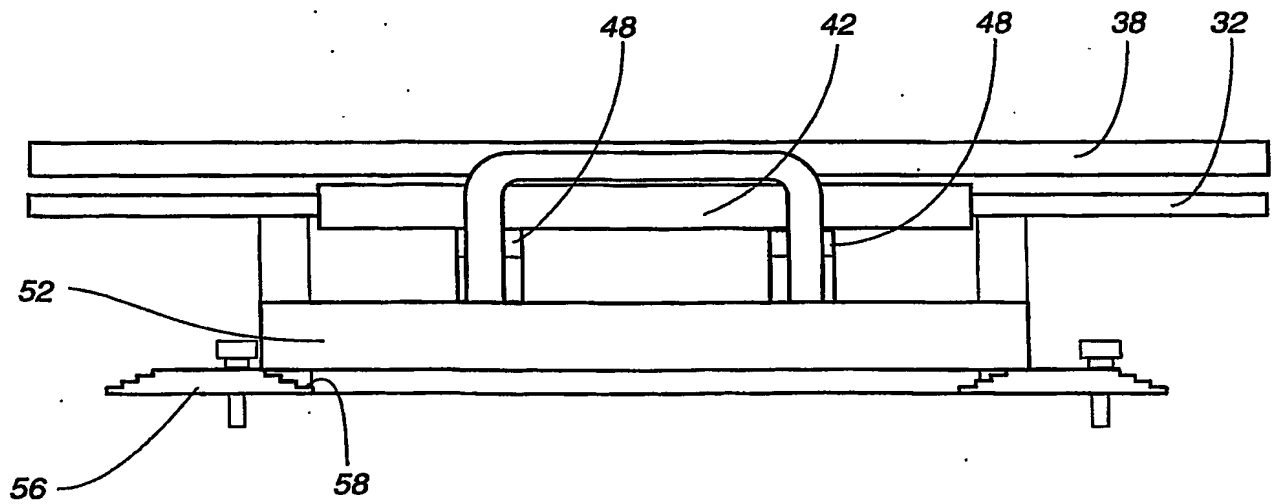

**Fig 8**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**